



APPLICATIONS

- Asphalt
- Rubber
- Plastic


Industrial odors caused by manufacturing — especially in plastics, rubber, and asphalt — can embed themselves in the end product. And no one wants a smelly product.

Because Ecosorb® industrial odor control is natural, it is non-reactive. This means it can be added to the end product, not just during the manufacturing process, to naturally and effectively neutralize malodors with no effect on the product itself.

Ecosorb odor control additive does not replace one odor for another. Your product will not have to take a perfumed aroma to address the existing odor concern. It does not mask industrial odors with fruit or flower fragrances that may not fit with your product. Instead, they eliminate malodors for good.

BENEFITS

- Removes odors from end product
- Does not affect product characteristics
- Effective even in heavy duty manufacturing

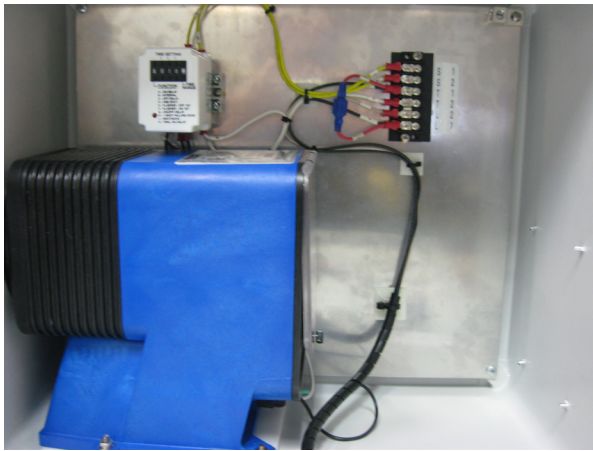

TECH SPECS

- 120 VAC, 1 Phase, 50 - 60Hz [230 VAC available]
- Manual or 2 auto trigger modes
- 25 ft. Copper tubing included
- Check valve kit included (3/8 NPT female thread)

OPTIONS

- 3 to 120 GPD Range [Pump sizes: 3, 6, 12, 24, 42, 60, 76, 120 GPD max.]
- Selectable shot time
- Attached or remotely connected tower light

